

Duris E3 50 Tile Whites

ILR-D350-xxxx-SD101-xx Series

Product Overview

At the heart of each Tile are 50 Duris E3 family LEDs from OSRAM Opto Semiconductors. These are new low and mid-power LEDs, which are ideal for efficient and homogeneous lighting applications. The combination of a small/medium lumen package, a wide beam angle and a compact footprint is perfect for uniform light distribution. Available with 200mm wires as standard.

Applications

- General Lighting
- Decorative Lighting
- Task Lighting
- Shelf Lighting
- Retail and Entertainment Lighting


Technical Features

- Tiles contain Duris E3 LEDs with high efficacy and a wide beam angle
- Up to 50,000 Hour lifetime to 70% of original brightness
- Size of printed circuit board (L x W x H) : 40mm x 40mm x 2.8mm
- Brightness adjustable by external dimming gear
- Single input voltage. Each board has own regulation built-in
- Operation with 24VDC Power Supply
- Up to 20 Duris E3 Tiles can be linked together to form longer chains
- Matching Power Supply available - check options in Power Supply section

*This datasheet should be read in conjunction with the relevant OSRAM Opto Semiconductors data on the LED used

Important Information and Precautions

- The Tile's LED, when powered up, is very bright. Thus it is advised that you do not look directly at it. Turn the Tile away from you and do not shine into the eyes of others.
- Tiles will overheat in operation if not attached to a suitable Heat Sink. Over heating can cause failure or irreparable damage.
- Do not operate Tiles with a Power Supply with unlimited current. Connection to constant voltage Power Supplies that are not current limited may cause the Tile to consume current above the specified maximum and cause failure or irreparable damage.
- Tiles, when operated, can reach high temperatures thus there is risk of injury if they are touched.
- DO NOT HOT PLUG ON LED SIDE OF POWER SUPPLY.

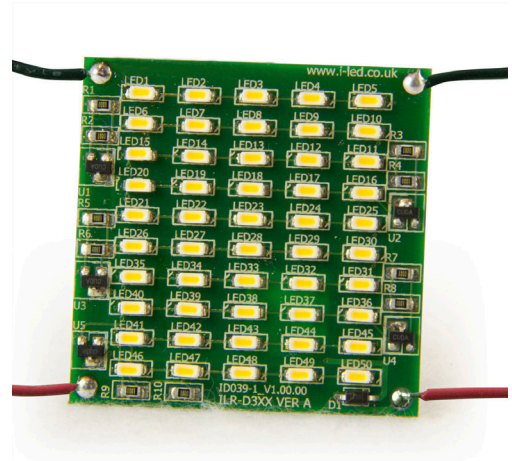

Product Options

ILS PART NUMBER	Colour	Colour Temp* (Degrees Kelvin)	Typical Wattage § @20mA	Input Voltage	Flux † @20mA	Radiance Angle	Relevant OSRAM LED Data
ILR-D350-HWWH-SD101-WIR200.	Hot White	2700K	0.49 watts	24 volts	350 lm	120° (± 60°)	LCWJNSH.EC
ILR-D350-WMWH-SD101-WIR200.	Warm White	3000K	0.49 watts	24 volts	350 lm	120° (± 60°)	LCWJNSH.EC
ILR-D350-NUWH-SD101-WIR200.	Neutral White	4000K	0.49 watts	24 volts	375 lm	120° (± 60°)	LCWJNSH.EC
ILR-D350-WHWH-SD101-WIR200.	White	5000K	0.49 watts	24 volts	375 lm	120° (± 60°)	LCWJNSH.EC
ILR-D350-DWWH-SD101-WIR200.	Street White	5600K	0.49 watts	24 volts	375 lm	120° (± 60°)	LUWJNSH.EC
ILR-D350-ULWH-SD101-WIR200.	Cool White	6500K	0.49 watts	24 volts	375 lm	120° (± 60°)	LUWJNSH.EC

* Due to the special conditions of the manufacturing processes of LEDs, the typical data of technical parameters can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from the typical data.

§ Tolerance +/- 10%

† Measured with 20mS 20mA pulse at 25 °c

Minimum and Maximum Ratings


ILS PART NUMBER	Operating Temperature at Tc-Point [°C]*	Storage Temperature [°C]*	Forward Current per chip [mA]*	Reverse Voltage [Vdc]*
ILR-D350-HWWH-SD101-WIR200.	40 °C max	- 40 to 110 °C	30mA max	Not designed for reverse voltage
ILR-D350-WMWH-SD101-WIR200.	40 °C max	- 40 to 110 °C	30mA max	Not designed for reverse voltage
ILR-D350-NUWH-SD101-WIR200.	40 °C max	- 40 to 110 °C	30mA max	Not designed for reverse voltage
ILR-D350-WHWH-SD101-WIR200.	40 °C max	- 40 to 110 °C	30mA max	Not designed for reverse voltage
ILR-D350-DWWH-SD101-WIR200.	40 °C max	- 40 to 110 °C	30mA max	Not designed for reverse voltage
ILR-D350-ULWH-SD101-WIR200.	40 °C max	- 40 to 110 °C	30mA max	Not designed for reverse voltage

* Exceeding maximum ratings for operating and storage temperature will reduce expected life time or destroy the LED module.


Exceeding maximum ratings for operating voltage will cause hazardous overload and is likely to destroy the LED module.

The temperature of the LED module must be measured at the Tc-Point according to EN60598-1 in a thermally constant status with a temperature sensor or a temperature sensitive label.

Radiation of single LED

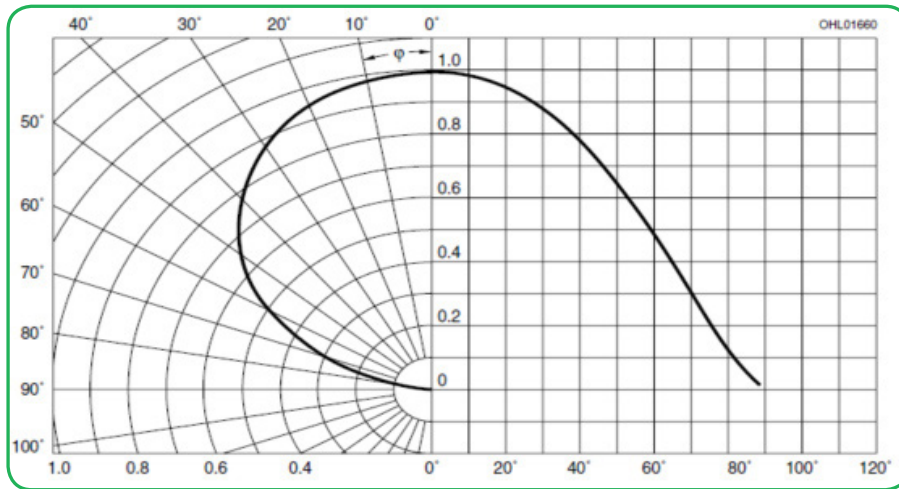

Technical Drawing with cables (mm)



3D drawing files are available on request from ILS. Please call or email

Duris E3 50 Tile Lens and Reflector Options

LEDiL precision-engineered Lenses and Reflectors allow for rapid deployment of all types of light fixtures, including street lights, wall-wash, high-bay, sconces, emergency beacons, parking garage/low-bay, MR and AR downlights, and dock lights. Precision-engineered for maximum efficiency and durability, LEDiL Lenses and Reflectors are released alongside the latest product releases from our LED suppliers. You select the best LED for the application; choose LEDiL and you're selecting the best optical solution as well.



There are currently no Lens or Reflector options available for the Duris family.

Duris E3 50 Tile Heat Sink Options

ILS has recently introduced a series of Aluminium Alloy Heat Sinks to be used with our standard range of PowerStars and PowerClusters. These Heat Sinks are supplied with fixing screws for the light engine and for fixing to a base plate. They also come with Thermal Interface Material (TIM) attached to the top surface. Available in Black, Red, Silver and Blue colour variants. More versions will be introduced over the coming months and we are also happy to manufacture custom Heat Sinks to your request.

	Operates under the recommended ILS junction temperature
	Operates under the recommended LED maximum junction temperature
	Not suitable for use
N/A	Heat Sink not designed for use with this product

ILS Product		No Heat Sink, in free air	ILA-HEATSINK-STAR-50X20MM.	ILA-HEATSINK-STAR-50X40MM.	ILA-HEATSINK-STAR-50X60MM.	ILA-HEATSINK-STAR-50X80MM.	ILA-HEATSINK-CLUSTER-70X70X55MM.	ILA-HEATSINK-CLUSTER-78X46X25MM.
Duris 1 PowerStar	100mA							
Duris 4 PowerStar	100mA							
Duris 9 PowerStar	100mA							
Duris 12 PowerCluster	100mA		N/A	N/A	N/A	N/A		
Duris 25 PowerCluster	100mA		N/A	N/A	N/A	N/A		
Duris 12 Tile	100mA		N/A	N/A	N/A	N/A		
Duris 50 Tile	100mA		N/A	N/A	N/A	N/A		
Duris 18 Strip	100mA		N/A	N/A	N/A	N/A	N/A	N/A
Duris 80 Strip	100mA		N/A	N/A	N/A	N/A	N/A	N/A



Duris E3 50 Tile Power Supply Options

Please call ILS for your driving requirements for our Duris Stars, Clusters, Tiles and Strips.

Thermal Interface Material Options

ILS have produced a range of High-performance, cost effective Thermal Interface Materials to match perfectly their standard products.

Our product fills the air pockets between the two surfaces, forming a continuous layer to conduct heat away from the LED to the Heat Sink.

ILS offer our TIM in three options – double sided adhesive, single sided adhesive and non adhesive.

There isn't currently TIM product for the Duris Tile.

Assembly Information

- The mounting of the Duris E3 50 Tile has to be on a metal Heat Sink.
- In order to optimise the thermal management, the metal surface needs to be clean (dirt and oil free) and planar for the best contact with the LED module. A thermal grease or heat transfer material is highly recommended.

Safety Information

- The LED module itself and all its components must not be mechanically stressed.
- Assembly must not damage or destroy conducting paths on the circuit board.
- The mounting of the module is carried out by attaching it at the mounting holes. Metal mounting screws must be insulated with synthetic washers to prevent circuit board damage and possible short circuiting.
- To avoid mechanical damage to the connecting cables, the boards should be attached securely to the intended substrate. Heavy vibration should be avoided.
- Observe correct polarity!
- Depending on the product, incorrect polarity will lead to emission of red or no light. The module can be destroyed!
- Pay attention to standard ESD precautions when installing the Duris E3 50 Tile.
- The Duris E3 50 Tiles, as manufactured, have no conformal coating and therefore offer no inherent protection against corrosion.
- Damage by corrosion will not be accepted as a materials defect claim. It is the user's responsibility to provide suitable protection against corrosive agents such as moisture and condensation and other harmful elements.
- For outdoor usage, a housing is definitely required to protect the board against environmental influences. The design of the housing must correspond to the IP standards in the application. It is also the responsibility of the user to ensure any housings or modifications keep the Tc junction temperature to within stated ranges.
- To also ease the luminaire/installation approval, electronic control gear for LED or LED modules should carry the CE mark and be ENEC certified. In Europe the declarations of conformity must include the following standards: CE: EC 61374-2-13, EN 55015, IEC 61547 and IEC 61000-3-2 - ENEC: 61374-2-13 and IEC/EN 62384.

For further information please contact ILS

The values contained in this data sheet can change due to technical innovations. Any such changes will be made without separate notification.