




OSLON® Square PowerStars Whites

ILH-OG01-xxxx-SC221-WIR200.

At the heart of each OSLON® Square PowerStar is one of the worlds most compact 2W high power LED with extremely low thermal resistance, remarkable high efficiency, highly reliable and superior corrosion robustness. The latest generation of the OSLON® Square still emits with a viewing angle of 120° but due to an increase in size of the silicon lens this improves the radiation pattern and enhances the performance. PowerStars are compact, powerful LED light sources built on aluminium substrates for optimal thermal management. Available with 200mm wires as standard.

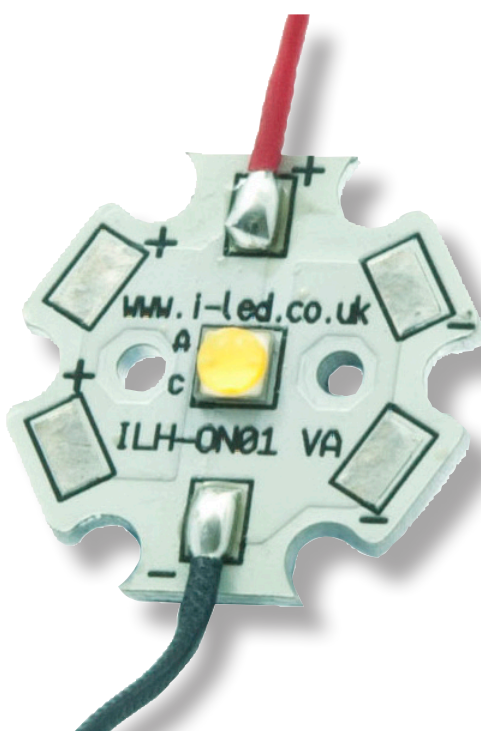

CONTENTS

Applications	page 2	Secondary Optics Options	page 6
Technical Features	page 2	Heatsink Options	page 7
Product Options	page 3	Power Supply Options	page 8
Minimum and Maximum Ratings	page 3	Thermal Interface Material Options	page 9
Accessories	page 4	Assembly Information	page 9
Technical Drawings	page 5	Important Information and Precautions	page 9
LED Radiation Diagram	page 5	Safety Information	page 10

APPLICATIONS

- » General Lighting
- » Spot Lighting
- » Task Lighting
- » Decorative Lighting
- » Retail and Entertainment Lighting

TECHNICAL FEATURES

LED Family	OSLON® Square
Lifetime	Up to 50,000 hours lifetime to 70% of original brightness
Mounting	Mounting holes using M3 screws allow easy installation
Dimensions	(L x W x H) 20 x 20 x 1.6mm
Wiring	Available with 200mm connecting wires
Secondary Optics	A secondary optic can be fitted. Suitable options on page 6 or visit our website for a full range
Heatsinks	Required over 350mA. Suitable options on page 8 or visit our website for a full range
Power Supply	4-75W dimming and non-dimming. Suitable options on page 9 or visit our website for a full range
Chain	PowerStars can be linked together to produce longer chains
Current Range	200 to 1800mA

PRODUCT OPTIONS

ILS Part Number	Colour	CCT/nm	Typical Power W § At 350mA	Forward Voltage	Flux † at 350mA	Radiance Angle	Relevant OSRAM LED Data
ILH-OG01-WMWH-SC221-WIR200.	Warm White	3000K	2.0W	2.7-3.2V	260lm	±60 (120°)	GWCSSRMx.PM
ILH-OG01-QZWH-SC221-WIR200.	Quartz White	3500K	2.0W	2.7-3.2V	270lm	±60 (120°)	GWCSSRMx.PM
ILH-OG01-NUWH-SC221-WIR200.	Neutral White	4000K	2.0W	2.7-3.2V	270lm	±60 (120°)	GWCSSRMx.PM
ILH-OG01-TUWH-SC221-WIR200.	Tungsten White	4500K	2.0W	2.7-3.2V	280lm	±60 (120°)	GWCSSRMx.PM
ILH-OG01-WHWH-SC221-WIR200.	White	5000K	2.0W	2.7-3.2V	280lm	±60 (120°)	GWCSSRMx.PM
ILH-OG01-STWH-SC221-WIR200.	Street White	5700K	2.0W	2.7-3.2V	290lm	±60 (120°)	GWCSSRMx.PM
ILH-OG01-ULWH-SC221-WIR200.	Ultra White	6500K	2.0W	2.7-3.2V	280lm	±60 (120°)	GWCSSRMx.PM

Due to the special conditions of the manufacturing processes of LEDs, the typical data of technical parameters can only reflect overall statistical figures, and do not necessarily correspond to the actual parameters of each single product, which could differ from the typical data.

§ Tolerance +/- 10%

† Measured with 20mS 700mA pulse at 25 °C

MINIMUM AND MAXIMUM RATINGS

ILS Part Number	Operating Temperature at Tc-Point [°C]	Storage Temperature [°C]	Forward Current per Module [mA]	Reverse Voltage [Vdc]
ILH-OG01-WMWH-SC221-WIR200.	-40 ... 125 (°C)	-40 ... 125 (°C)	1800mA	Not designed for reverse operation
ILH-OG01-QZWH-SC221-WIR200.	-40 ... 125 (°C)	-40 ... 125 (°C)	1800mA	Not designed for reverse operation
ILH-OG01-NUWH-SC221-WIR200.	-40 ... 125 (°C)	-40 ... 125 (°C)	1800mA	Not designed for reverse operation
ILH-OG01-TUWH-SC221-WIR200.	-40 ... 125 (°C)	-40 ... 125 (°C)	1800mA	Not designed for reverse operation
ILH-OG01-WHWH-SC221-WIR200.	-40 ... 125 (°C)	-40 ... 125 (°C)	1800mA	Not designed for reverse operation
ILH-OG01-STWH-SC221-WIR200.	-40 ... 125 (°C)	-40 ... 125 (°C)	1800mA	Not designed for reverse operation
ILH-OG01-ULWH-SC221-WIR200.	-40 ... 125 (°C)	-40 ... 125 (°C)	1800mA	Not designed for reverse operation

Exceeding maximum ratings for operating and storage temperature will reduce expected life time or destroy the LED module.

Exceeding maximum ratings for operating voltage will cause hazardous overload and will likely destroy the LED module.

The temperature of the LED module must be measured at the Tc-Point according to EN60598-1 in a thermally constant status with a temperature sensor or a temperature sensitive label.


ACCESSORIES

Secondary Optics Options



LEDiL precision-engineered lenses and reflectors allow for rapid deployment of all types of light fixtures, including street lights, wall-wash, high-bay, sconces, emergency beacons, parking garage/low-bay, MR and AR downlights, and dock lights. Precision-engineered for maximum efficiency and durability, LEDiL lenses and reflectors are released alongside the latest products from our LED suppliers. Suitable options on [page 6](#) or visit [our website](#) for a full range.

Heatsinks



ILS has a series of aluminium alloy heatsinks to be used with our standard range of PowerStars and PowerClusters. These heatsinks are supplied with fixing screws for the light engine and for fixing to a base plate. They also come with thermal interface material (TIM) attached to the top surface. Suitable options on [page 6](#) or visit [our website](#) for a full range.


Power Supplies

ILS has a comprehensive range of standard power supplies. The table below shows the total number of ILS products each power supply can drive. Additional power supplies are being introduced so please call us or [check our website](#) for the latest offering. Suitable options on [page 7](#)




Thermal Interface Material (TIM)


ILS has produced a range of high-performance, cost effective thermal interface materials to perfectly match their standard products. Our product fills the air pockets between the two surfaces, forming a continuous layer to conduct heat away from the LED to the heatsink. ILS offers TIM in three options – double sided adhesive, single sided adhesive and non adhesive. Suitable options on [page 7](#) or visit [our website](#) for a full range.

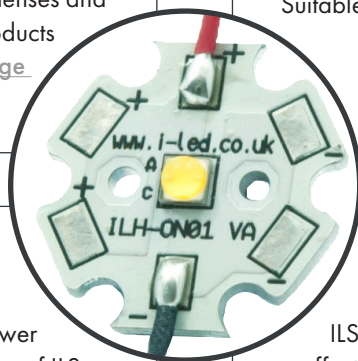

TECHNICAL DRAWINGS (MM)

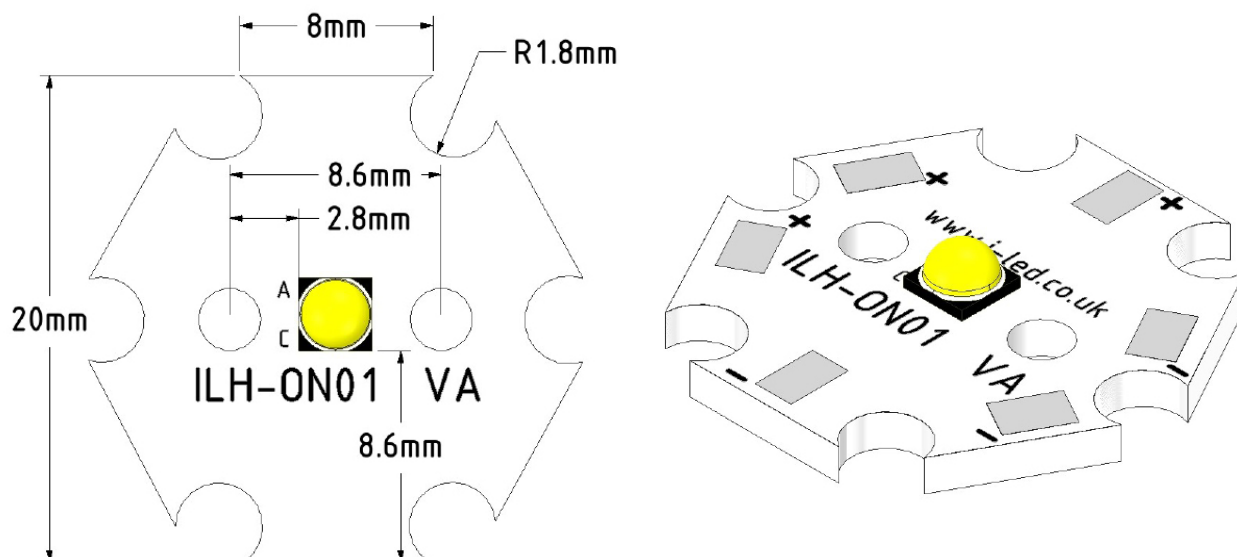

RADIATION OF SINGLE LED

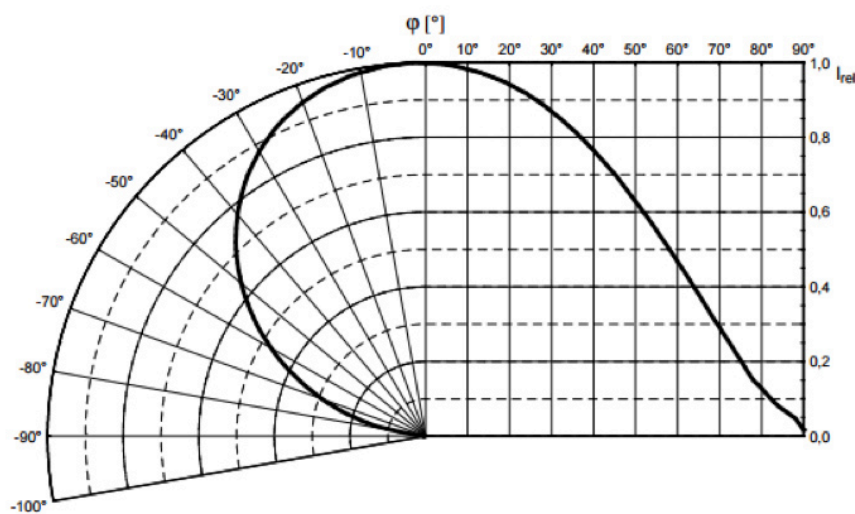

SECONDARY OPTICS OPTIONS

LEDiL precision-engineered Lenses and Reflectors allow for rapid deployment of all types of light fixtures, including street lights, wall-wash, high-bay, sconces, emergency beacons, parking garage/low-bay, MR and AR down lights, and dock lights. Precision-engineered for maximum efficiency and durability, LEDiL Lenses and Reflectors are released alongside the latest product releases from our LED suppliers. You select the best LED for the application; choose LEDiL and you're selecting the best optical solution as well.

Ordering Code	Beam	Diameter	Height	Family	FWHM	Efficiency	cd/lm	Material/Lens	Colour	Fastening
C13155_EMERALD-A	O	21.6	6.9	Emerald	0	0	0	PMMA	clear	glue, pin
CA13156_EMERALD-A	O	21.6	7.3	Emerald	152+76	90	1.78	PMMA	clear	tape, pin
CA11388_EMILY-M	M	26	14.85	Emily	0	0	0	PMMA	clear	tape, pin
CA11389_EMILY-O	O	26	14.97	Emily	0	0	0	PMMA	clear	tape, pin
CA11391_EMILY-M2	M2	26	14.88	Emily	0	0	0	PMMA	clear	tape, pin
CA12062_EMILY-D	D	26	14.74	Emily	0	0	0	PMMA	clear	tape, pin
CA13546_EMILY-RS	RS	26	14.74	Emily	0	0	0	PMMA	clear	tape
CA15359_EMILY-WW	WW	26	14.74	Emily	44	93	1.7	PMMA	clear	pin, tape
FCA15451_FLORENTINA-1-M		39.7x39.7	17.55	Florentina	31	79	2.6	PC	black	
FCA15452_FLORENTINA-1-O	O	39.7x39.7	17.552	Florentina	44+17	74	2.9	PC	black	
FCA15453_FLORENTINA-1-W	W	39.7x39.7	17.552	Florentina	44	73	1.3	PC,PC	black	
FC15456_FLORENTINA-1-D-60	D	39.7x39.7	31.87	Florentina	20	79	5.4		black	tape
FC15457_FLORENTINA-1-M-60	M	39.7x39.7	31.87	Florentina	31	79	2.6	PC	black	tape
FC15458_FLORENTINA-1-O-60	O	39.7x39.7	31.87	Florentina	44+17	74	2.9		black	tape
FC15459_FLORENTINA-1-W-60	W	39.7x39.7	31.87	Florentina	44	73	1.3		black	tape
CA16202_GABRIELLA-MIDI-S	S	37.8	24.08	Gabriella	0	0	0	PMMA	black	tape, pin
CA11264_HEIDI-D	D	21.6	11.7	Heidi				PMMA	clear	pin, tape
CA11265_HEIDI-M	M	21.6	11.7	Heidi				PMMA	clear	tape, pin
CA11266_HEIDI-O	O	21.6	11.7	Heidi	52+13	80	3.67	PMMA	clear	pin, tape
CA11267_HEIDI-O-90	O-90	21.6	12.1	Heidi	15+51	78	2.71	PMMA	clear	tape, pin
CA11268_HEIDI-W	W	21.6	11.7	Heidi	32	86	3	PMMA	clear	pin, tape
CA11663_HEIDI-RS	RS	21.6	11.7	Heidi	10	89	20.8	PMMA	clear	pin, tape
CA12242_HEIDI-SS	SS	21.6	11.7	Heidi				PMMA	clear	tape, pin
CA14505_G2-LXP2-RS2-P	RS2	21.8	14.7	Leila				PMMA	black	pin, tape
CA14507_G2-LXP2-D-P	D	21.8	14.7	Leila					black	tape, pin
CA14509_G2-LXP2-M-P	M	21.8	14.7	Leila					black	tape, pin
FP13028_LISA2-M-PIN	M	9.9	6.8	Lisa	0	0	0	PMMA	black	pin, glue
FP13030_LISA2-M-CLIP	M	9.9	6.8	Lisa	0	0	0	PMMA	black	glue, clips
FCP13895_SEANNA-A	RS	152.6	79	Seanna	1.5	94	587	PMMA	black	pin, screw
C13472_STRADA-B2		19.6 x 15.5	5.2	Strada				PMMA	clear	glue, pin
C12726_STRADA-SQ-T-DWC	Street	25 x 25	8	Strada				PMMA	clear	glue, pin, screw
C12727_STRADA-SQ-VSM	Street	25 x 25	6.8	Strada				PMMA	clear	glue, screw, pin
CA16206_SURI-RS	RS	37.8	24	Suri	0	0	0	PMMA	black	tape, pin
CA12377_TINA2-M	M	16	9.5	Tina	0	0	0	PMMA	black	tape, pin
FA11208_TINA-RS	RS	16.1	9.5	Tina	0	0	0	PMMA	black	tape, pin
FA11209_TINA-D	D	16.1	9.4	Tina	0	0	0	PMMA	black	tape, pin
CA12346_TINA2-RS	RS	16.1	9.5	Tina	0	0	0	PMMA	white	tape
CA12347_TINA2-D	D	16.1	9.5	Tina	0	0	0	PMMA	white	tape
CA12426_TINA3-W	W	16.1	6.9	Tina	0	0	0	PMMA	white	tape, pin
C13253_TINA2-R-CLIP16	WW	16.1	10.1	Tina	0	0	0		clear	clips
CA14601_VERONICA-SQ-MINI-RS	RS	13.9+13.9	8.86	Veronica				PMMA	clear	tape, pin
CA14602_VERONICA-SQ-MINI-O	O	13.9+13.9	8.86	Veronica				PMMA	clear	tape, pin
CA15519_VERONICA-SQ-MINI-D	D	13.9+13.9	8.86	Veronica	0	0	0	PMMA	clear	tape, pin
CA13724_VERONICA-SQ-RS	RS	22.5 + 22.5	12.2	Veronica				PMMA	clear	tape, pin
CA13726_VERONICA-SQ-O	O	22.5 + 22.5	12.2	Veronica				PMMA	clear	tape, pin
CA14442_VERONICA-SQ-W	W	22.5x22.5	12.2	Veronica				PMMA	clear	
C13528_VERONICA-RS	RS	26	12.2	Veronica	0	0	0	PMMA	clear	glue, pin
C12608_VIRPI-M	M	74.9 x 74.9	9.5	Virpi				PMMA	clear	glue, pin
C12609_VIRPI-W	W	74.9 x 74.9	9.5	Virpi				PMMA	clear	glue, pin

[Click here to visit our website for our latest range](#)

HEATSINK OPTIONS

ILS Product		OSLON 1 PowerStars		
		350mA	700mA	1000mA
No Heatsink, in free air				
ILA-HSINK-STAR-50X20MM				
ILA-HSINK-STAR-50X40MM				
ILA-HSINK-STAR-50X60MM				
ILA-HSINK-STAR-50X80MM				
ILA-HSINK-70X70X55MM				
ILA-HSINK-78X46X25MM				

KEY

	Operates under the recommended ILS junction temperature
	Operates under the recommended LED maximum junction temperature
	Not suitable for use
	Heatsink not designed for use with this product

[Click here to visit our website for our latest range](#)

POWER SUPPLY OPTIONS

	ILS Driver Part Number	Rating	Current	LED Driver Voltage	Dimming
	IZC070-004F-4065C-SAL	4W	700mA	2-6V	No
	IZC035-004F-4065C-SAL	4W	350mA	3-12V	No
	IZC035-008F-5065C-SAL	8W	350mA	3-36V	No
	IZC070-008F-5065C-SAL	8W	700mA	3-12V	No
	IZC035-017F-0067A-SAL	17W	350mA	6-48V	No
	IZC070-035F-0067C-SAL	35W	700mA	9-48V	No
	IZC070-050A-9267C-SAL	50W	700mA	24-72V	Yes
	IT-FIT-4/220-240/400-CS-I	4W	100-400mA	2.5-10V	No
	IT-FIT 7/220-240/700-CS-I	7W	350-700mA	2.5-11V	NO
	IT-DALI-12/220-240/300-CS	12W	90-300mA	9-42V	DALI
	OTi-DALI-10/220-240/700 NFC-I	10W	150-700mA	2.5-45V	DALI
	OTi-DALI-15/220-240/1A0-NFC-LP	15W	150-1050mA	10-54V	DALI

[Click here to visit our website for our latest range](#)

THERMAL INTERFACE MATERIAL OPTIONS

Non Adhesive	Single Sided Adhesive	Double Sided Adhesive
ILA-TIM-STAR-0A	ILA-TIM-STAR-1A	ILA-TIM-STAR-2A
Other sizes are available, including customised parts		

[Click here to visit our website for our latest range](#)

ASSEMBLY INFORMATION

- » The mounting of the PowerStar has to be on a metal heatsink.
- » In order to optimise the thermal management, the metal surface needs to be clean (dirt and oil free) and planar for the best contact with the LED module. A thermal grease or heat transfer material is highly recommended.

IMPORTANT INFORMATION AND PRECAUTIONS



The LED module's LED, when powered up, is very bright. Thus it is advised that you do not look directly at it. Turn the LED module away from you and do not shine into the eyes of others.



LED modules, when operated, can reach high temperatures thus there is risk of injury if they are touched.



LED modules will overheat in operation if not attached to a suitable heatsink. Overheating can cause failure or irreparable damage.



DO NOT HOT PLUG ON LED SIDE OF POWER SUPPLY.



Do not operate LED modules with a power supply with unlimited current. Connection to constant voltage power supplies that are not current limited may cause the PLED module to consume current above the specified maximum and cause failure or irreparable damage.



DO NOT TOUCH or PUSH on the LED as this can cause irreparable damage.

SAFETY INFORMATION



The LED module itself and all its components must not be mechanically stressed.



Assembly must not damage or destroy conducting paths on the circuit board.



The mounting of the module is carried out by attaching it at the mounting holes. Metal mounting screws must be insulated with synthetic washers to prevent circuit board damage and possible short circuiting.



To avoid mechanical damage to the connecting cables, the boards should be attached securely to the intended substrate. Heavy vibration should be avoided.



Observe correct polarity! Depending on the product, incorrect polarity will lead to emission of red or no light. The module can be destroyed!



Pay attention to standard ESD precautions when installing the LED modules.



The LED modules, as manufactured, have no conformal coating and therefore offer no inherent protection against corrosion. Damage by corrosion will not be accepted as a materials defect claim. It is the user's responsibility to provide suitable protection against corrosive agents such as moisture and condensation and other harmful elements.



For outdoor usage, a housing is definitely required to protect the board against environmental influences. The design of the housing must correspond to the IP standards in the application. It is also the responsibility of the user to ensure any housings or modifications keep the T_c junction temperature to within stated ranges.



To also ease the luminaire/installation approval, electronic control gear for LED or LED modules should carry the CE mark and be ENEC certified. In Europe the declarations of conformity must include the following standards: CE: EC 61374-2-13, EN 55015, IEC 61547 and IEC 61000-3-2 - ENEC: 61374-2-13 and IEC/EN 62384.



The evaluation of eye safety occurs according to the standard IEC 62471:2006 ("photobiological safety of lamps and lamp systems"). Within the risk grouping system of this CIE standard, the LED specified in this datasheet falls into the class "moderate risk" (exposure time 0.25s). Under real circumstances (for exposure time, eye pupils, observation distance), it is assumed that no endangerment to the eye exists from these devices. As a matter of principle, however, it should be mentioned that intense light sources have a high secondary exposure potential due to their blinding effect. As is also true when viewing other bright light sources (e.g. headlights), temporary reduction in visual acuity and afterimages can occur, leading to irritation, annoyance, visual impairment and even accidents, depending on the situation.

FURTHER INFORMATION

The values contained in this datasheet can change due to technical innovation. Any such changes will be made without separate notification.

If you require further assistance or have a specific or custom enquiry, please contact the ILS team via email or phone. Alternatively please visit our website for more product information and to see our full ranges.



Unit 2, Berkshire Business Centre,
Berkshire Drive, Thatcham,
Berkshire, RG19 4EW

+44 (0)1635 294606

info@i-led.co.uk

<https://i-led.co.uk>

ABOUT ILS

ILS offers a high level of technical skill, professionalism and commercial understanding to companies requiring market-leading optoelectronics solutions. Offering conceptual advice, electronics design and manufacturing capability, we use high quality production resources both in-house and in Asia, providing project support from prototyping to mass production. We also understand the need to provide cost-effective solutions and we do so using high quality components to ensure that the end product's reliability and quality is uncompromised. Apart from LEDs in the visible spectrum, we have a wide range of Infrared, UV LEDs, UV tubes, and lasers.

ILS is a division of Intelligent Group Solutions Ltd (IGS) a well-established respected industry leading Optoelectronics solutions provider. Much of IGS' business comes from providing semi-custom or custom products both in component and sub-assembly form, and from providing design support and prototyping within the European market place. We can deliver production displays to wherever in the world that the customer's manufacturing or assembly is being undertaken.

INTELLIGENT GROUP SOLUTIONS DIVISIONS

