

Light is OSRAM

OSRAM

OSRAM TEC Flex Shortpitch IP66

The installation is easy also in dry and damp environments

TFP600/1000/1500/2000S-G1



Application areas

Architectural lighting
Integration into coves, walls, object and furniture integration
Dry and damp environments


Standards

CE, ENEC, RoHS

Features & Benefits

- 24V Constant Voltage Dimmable IP66 LED strip
- High homogeneity and uniform illumination due to 140LEDs
- Constant flux over length and power supply variations thanks to active IC on each single unit
- Luminous flux range: 600lm/m, 1000lm/m, 1500lm/m, 2000lm/m
- Color temperature: 2700K, 3000K, 4000K, 5000K, 6500K
- Single color bin in 3SDCM
- High Efficiency LED strips enabling energy saving
- Fast and reliable protection for accidental reverse power supply
- Robust ESD protection
- Improved self-adhesive backside for easy and reliable mounting
- Cables soldered one side for quick and safe installation
- Long lifetime: 50.000 hours
- 5 Years OSRAM Guarantee
- System solution in combination with OSRAM 24V Constant Voltage LED drivers, optional connectors, mounting accessories

Dimension & Length

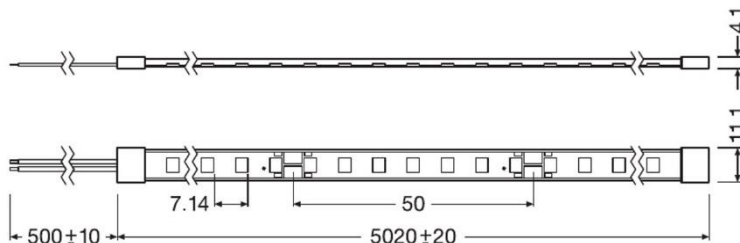

Lowest Bending Radius = 50mm
Number LED/m = 140
Pre-soldered wires on one side
*end cap is included

Electrical & Output data

Nominal Voltage	24.0 V
Reverse voltage protection up to	25.0 V
Temperature range in operation @ Tc point	-25...+80 °C
Storage Temperature	-30...+85 °C
Ambient Temperature with profile**	-25...+50 °C

Technical data

GENERAL


Dimmable	Pulse width modulation (PWM)
Dimming range	1...100%
Lifetime	50.000 hrs (L70B50 & L80B50, Tp rated)
Adhesive tape on backside	3M
Complementary systems	Connectors, Profiles and covers, OPTOTRONIC drivers and dimmers
Minimum bending radius	5 cm
Protection type	IP66
Classification acc. to IEC 62031	Built-in

REFERENCE DATA


TFP Shortpitch		Nominal CCT*	CRI	Lm/m	W/m	Luminous efficacy lm/W	LEDs/m	Performance Temp. Tp°C	Length m
TFP600S-G1-827	●	2700 K	>80	600	5.5	109	140	35	5
TFP600S-G1-830	●	3000 K	>80	640	5.5	116	140	35	5
TFP600S-G1-840	○	4000 K	>80	640	5.5	116	140	35	5
TFP600S-G1-850	●	5000 K	>80	660	5.5	120	140	35	5
TFP600S-G1-865	●	6500 K	>80	650	5.5	118	140	35	5
TFP1000S-G1-827	●	2700 K	>80	1030	9	114	140	40	5
TFP1000S-G1-830	●	3000 K	>80	1110	9	123	140	40	5
TFP1000S-G1-840	○	4000 K	>80	1080	9	120	140	40	5
TFP1000S-G1-850	●	5000 K	>80	1130	9	126	140	40	5
TFP1000S-G1-865	●	6500 K	>80	1120	9	124	140	40	5
TFP1500S-G1-827	●	2700 K	>80	1530	13.2	116	140	45	5
TFP1500S-G1-830	●	3000 K	>80	1620	13.2	123	140	45	5
TFP1500S-G1-840	○	4000 K	>80	1630	13.2	123	140	45	5
TFP1500S-G1-850	●	5000 K	>80	1670	13.2	127	140	45	5
TFP1500S-G1-865	●	6500 K	>80	1660	13.2	126	140	45	5
TFP2000S-G1-827	●	2700 K	>80	1690	15.5	109	140	50	5
TFP2000S-G1-830	●	3000 K	>80	1910	15.5	123	140	50	5
TFP2000S-G1-840	○	4000 K	>80	1920	15.5	124	140	50	5
TFP2000S-G1-850	●	5000 K	>80	1960	15.5	126	140	50	5
TFP2000S-G1-865	●	6500 K	>80	1940	15.5	125	140	50	5

Photometrics characteristics


TFPx00S-G1-827

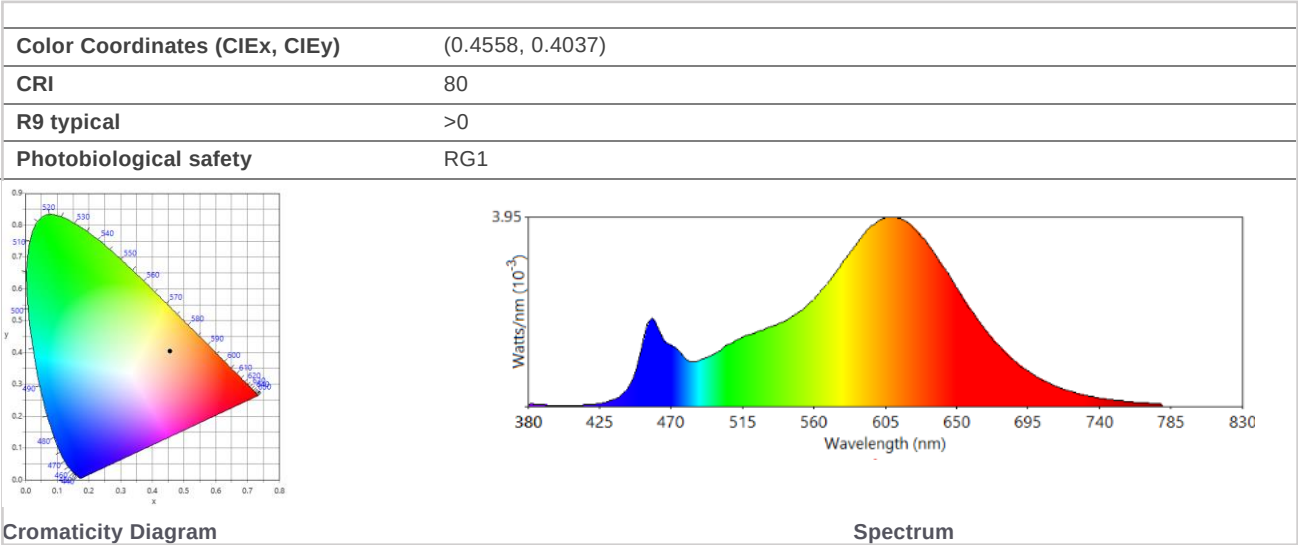


TFPx00S-G1-830

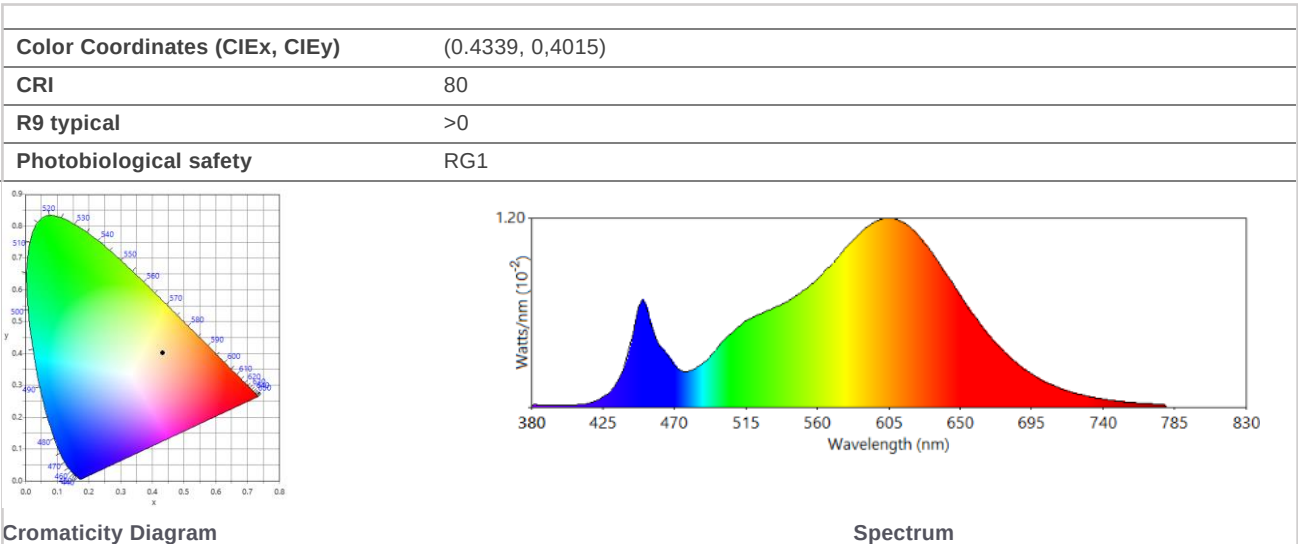


TFPx00S-G1-840

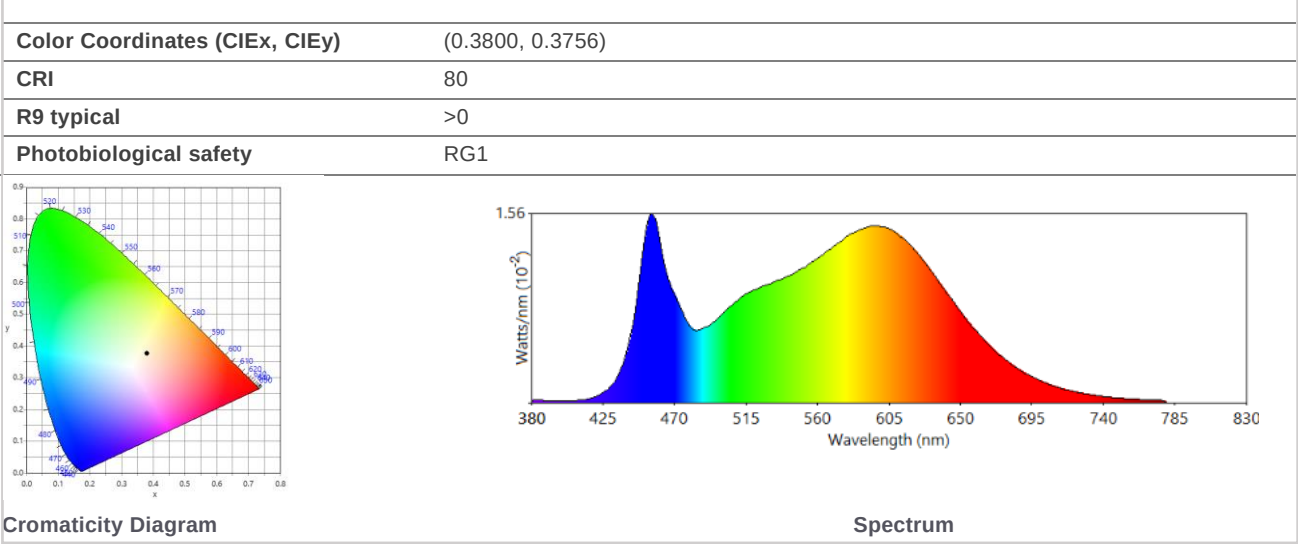


TFPx00S-G1-850

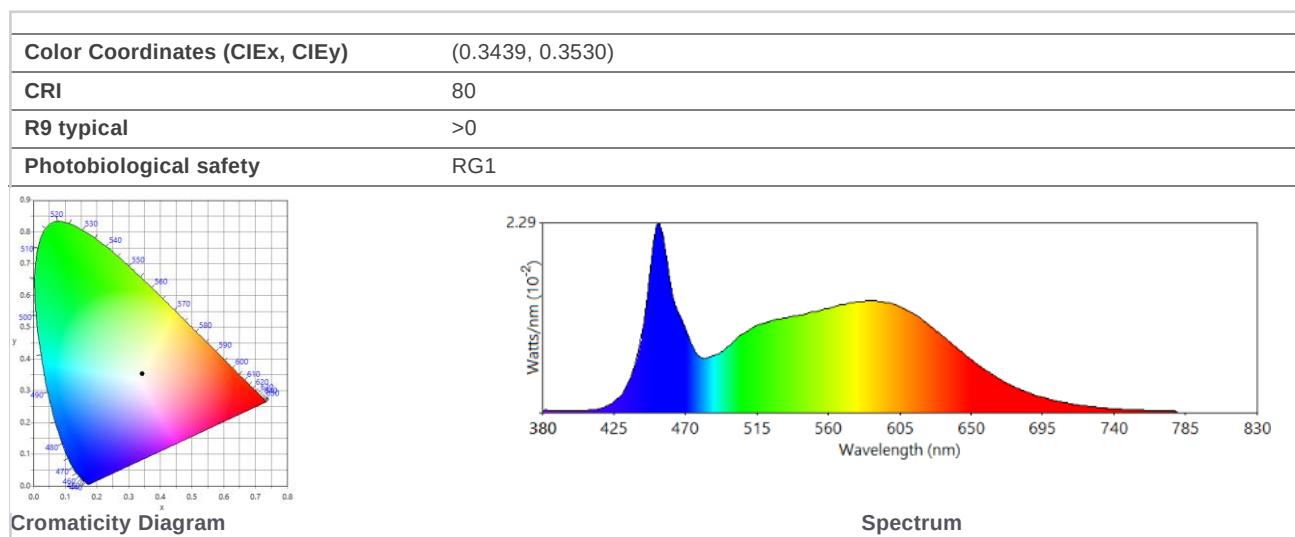


TFPx00S-G1-865

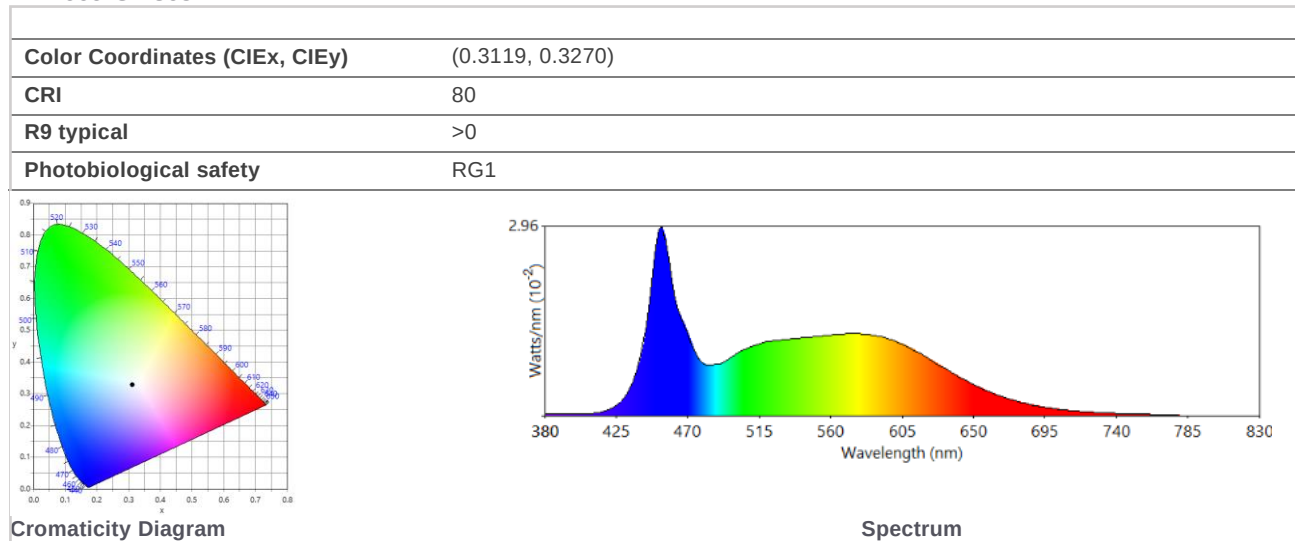

Light Distribution



Luminous Flux maintenance according to Tp value

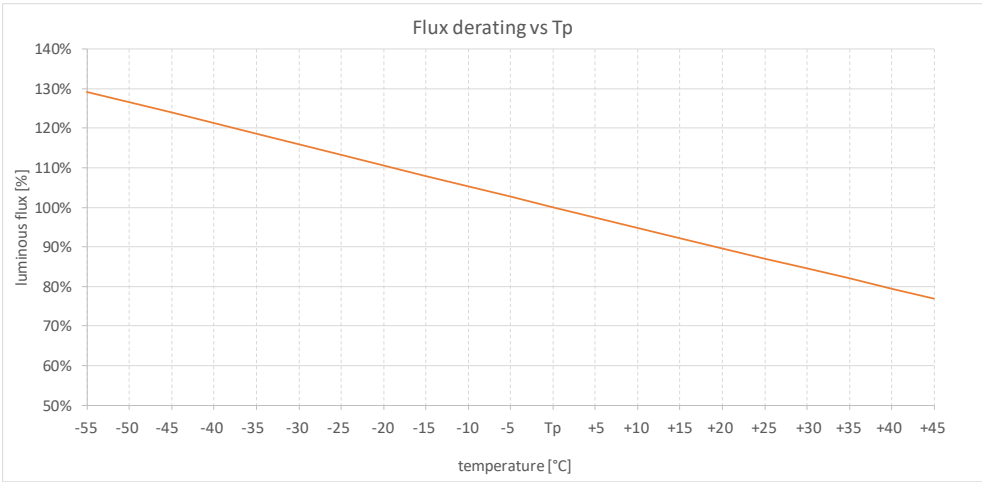

Note: Light flux varies with the temperature measured @Tc point; nominal values is given @Tc = Tp. Flux increases when Tc decreases.

Lumen maintenance for TEC Flex Protect Shortpitch

Supply Voltage	Tp Temperature	L80B10	L80B50	L70B10	L70B50
24V	45°C	>50.000	>50.000	>50.000	>50.000
24V	55°C	>50.000	>50.000	>50.000	>50.000
24V	65°C	>50.000	>50.000	>50.000	>50.000
24V	70°C	>50.000	>50.000	>50.000	>50.000

Ordering Data

Product description	Product code (EAN10)	Dimensions (length x width x height)	Package content* (EAN40)
TFP600S-G1-827	4062172134279	280X 305X 180mm	10x Led strip
TFP600S-G1-830	4062172134293	280X 305X 180mm	10x Led strip
TFP600S-G1-840	4062172134316	280X 305X 180mm	10x Led strip
TFP600S-G1-850	4062172134330	280X 305X 180mm	10x Led strip
TFP600S-G1-865	4062172134354	280X 305X 180mm	10x Led strip
TFP1000S-G1-827	4062172134378	280X 305X 180mm	10x Led strip
TFP1000S-G1-830	4062172134392	280X 305X 180mm	10x Led strip
TFP1000S-G1-840	4062172134415	280X 305X 180mm	10x Led strip
TFP1000S-G1-850	4062172134439	280X 305X 180mm	10x Led strip
TFP1000S-G1-865	4062172134453	280X 305X 180mm	10x Led strip
TFP1500S-G1-827	4062172134477	280X 305X 180mm	10x Led strip
TFP1500S-G1-830	4062172134491	280X 305X 180mm	10x Led strip
TFP1500S-G1-840	4062172134514	280X 305X 180mm	10x Led strip
TFP1500S-G1-850	4062172134538	280X 305X 180mm	10x Led strip
TFP1500S-G1-865	4062172134552	280X 305X 180mm	10x Led strip
TFP2000S-G1-827	4062172134576	280X 305X 180mm	10x Led strip
TFP2000S-G1-830	4062172134590	280X 305X 180mm	10x Led strip
TFP2000S-G1-840	4062172134613	280X 305X 180mm	10x Led strip
TFP2000S-G1-850	4062172134637	280X 305X 180mm	10x Led strip
TFP2000S-G1-865	4062172134651	280X 305X 180mm	10x Led strip

*Each LED strip comes with 1 bottle of glue (5g), 10 endcaps, 40 screws, 20clips

Optional Accessories

Product Type	Product description	Product code	Package content
 Connector	FX-SC08-G2-C2PF-IP54-0500	4052899464889	20x Connector (500mm wire)
 Silicon boot	FX-SC08-G2-BTJ-IP54	4052899568853	25x Silicon boot
 Jumper	FX-SC08-G2-CT4PJ	4052899464858	25x Jumper

Note: All TEC Flex LED strips are fully compatible with OSRAM OT and OTi LED drivers and dimmers.

Profile System Combinations

Maximum recommended ambient temperature in case of surface mounting.

 Surface Mounting				TFP600S	TFP1000S	TFP1500S	TFP2000S
Type	Product Description		Product code (EAN)	Ambient Temperature °C			
	Slim Track	LF-LTS-2100	4008321978981	50	50	50	45
	Slim Track	FX-QMS-G1-TU15H6-300	4052899448865	50	50	50	45
	Slim Track	FX-QMS-G1-TU15H6W3-300	4052899448889	50	50	50	45
	Slim Track	FX-QMS-G1-TU16H12-300	4052899448964	50	50	50	48
	Slim Track	FX-QMS-G1-TU16H12W3-300	4052899448988	50	50	50	48
	Slim Track	FX-QMS-G1-TR19H16-300	4052899449008	50	50	50	48
	Slim Track	FX-QMS-G1-TU16H12LS-300	4052899449046	50	50	50	48
	Slim Track	FX-QMS-G1-T45D19H19-300	4052899448667	50	50	50	45
	Wide Track	FX-QMW-G1-TK30D46H27-300	4052899448827	50	50	50	50
	Wide Track	FX-QMW-G1-TU26H10-300	4062172114165	50	50	50	50
	Wide Track	FX-QMW-G1-TU26H25W10-300	4052899448773	50	50	50	50
	Wide Track	FX-QMW-G1-TU26H25W2-300	4052899448841	50	50	50	50
	Wide Track	FX-QMW-G1-TU26H25-300	4052899448803	50	50	50	50

Maximum recommended ambient temperature in case of recessed mounting.

 Recessed mounting				TFP600S	TFP1000S	TFP1500S	TFP2000S
Type	Product Description		Product code (EAN)	Ambient Temperature °C			
	Slim Track	LF-LTS-2100	4008321978981	50	50	45	40
	Slim Track	FX-QMS-G1-TU15H6-300	4052899448865	50	50	45	40
	Slim Track	FX-QMS-G1-TU15H6W3-300	4052899448889	50	50	45	40
	Slim Track	FX-QMS-G1-TU16H12-300	4052899448964	50	50	48	43
	Slim Track	FX-QMS-G1-TU16H12W3-300	4052899448988	50	50	48	43
	Slim Track	FX-QMS-G1-TR19H16-300	4052899449008	50	50	48	43
	Slim Track	FX-QMS-G1-TU16H12LS-300	4052899449046	50	50	48	43
	Slim Track	FX-QMS-G1-T45D19H19-300	4052899448667	50	50	45	40
	Wide Track	FX-QMW-G1-TK30D46H27-300	4052899448827	50	50	50	48
	Wide Track	FX-QMW-G1-TU26H10-300	4062172114165	50	50	48	43
	Wide Track	FX-QMW-G1-TU26H25W10-300	4052899448773	50	50	45	40
	Wide Track	FX-QMW-G1-TU26H25W2-300	4052899448841	50	50	45	40
	Wide Track	FX-QMW-G1-TU26H25-300	4052899448803	50	50	45	40

Note: the table is for application evaluation only; always ensure that Tc do not exceed the maximum allowed value.

Disclaimer

Subject to change without notice. Errors and omission excepted. Make sure to use the most recent release. All values are average typical and cannot be used as reference for compliance tests. Always refer to the official data on web site: www.osram.com

* LEDs used in OSRAM strips are single BIN 3 SDCM ellipse.

** Always ensure that Tc will not exceed the maximum allowed value (e.g. suggested aluminum bar section: 8x2mm or equivalent).



Intelligent LED Solutions, Unit 2, Berkshire Business Centre, Berkshire Drive, Thatcham, Berkshire, RG19 4EW
Telephone: +44 (0)1635 294606 Email: info@i-led.co.uk Web: www.i-led.co.uk
A division of Intelligent Group Solutions Ltd

OSRAM GmbH

Head Office:

Marcel-Breuer-Strasse 6
80807 Munich, Germany
Phone +49 89 6213-0
Fax +49 89 6213-2020
www.osram.com

OSRAM